


ZTACW ZTTCW



产品特点及应用范围:





- 超小体积
- 价格低廉
- 盘带包装
- 可回流焊接
- 无铅环保产品
- 消费类电子产品
- 通信产品
- 电脑
- 收音机

产品性能

性能参数	条件	ZTACW□MX ZTTCW□MX
频率范围	F ₀	20.00MHz~60.00MHz
频率精度		±0.5%
频率温度稳定度	-20°C~+80°C	±0.3%
老化率(10年)		±0.3%


外形尺寸 (mm)

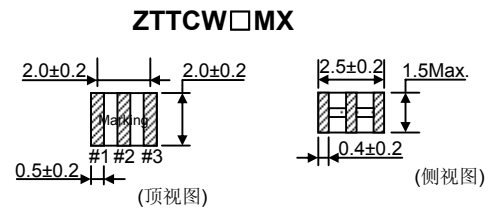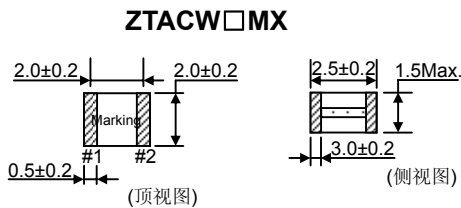

引脚	功能
#1	输入
#2	输出


引脚	功能
#1	输入
#2	接地
#3	输出

MOS IC 测试电路

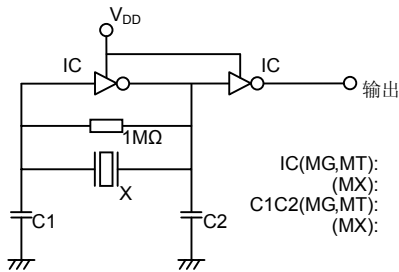

IC(MG,MT): 1/6TC4069UBP×2
 (MX): 1/6TC74HCU04×2
 C1C2(MG,MT): 30pF
 (MX): 30pF(13.01~20.0MHz)
 15pF(20.01~25.99MHz)
 5pF(26.00~60.00MHz)
 X: 陶瓷谐振器
 V_{DD}: +5V


ZTACW□MX

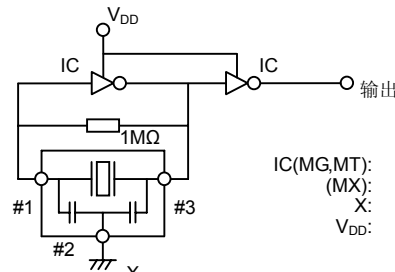


IC(MG,MT): 1/6TC4069UBP×2
 (MX): 1/6TC74HCU04×2
 X: 陶瓷谐振器
 V_{DD}: +5V

ZTTCW□MX

推荐焊盘尺寸



ZTACW□MX



ZTTCW□MX

型号	尺寸 (mm)			
	T ₁	T ₂	T ₃	W
ZTACW□MX	0.5±0.2	0.5±0.2	2.0±0.2	2.6±0.2
ZTTCW□MX	0.5±0.2	0.5±0.2	1.0±0.2	2.6±0.2